

Vector Frame Backlit Modular Tower 06 4'X12'

VF-BL-TOWER-06
VF-BL-TOWER-06-MM

The Vector Frame™ Backlit Tower 06 is an illuminated rectangular architectural structure that measures 12'h and 4' square at the top and bottom. The Backlit Tower 06 couples extrusion frames with interchangeable, vibrant push-fit fabric graphics and an internal lighting kit to create a dramatic and impressive accent or focal point. Add an optional monitor mount for additional branding and digital messaging opportunities. Each kit comes with a molded, wheeled case for easy storage and transportation.




We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:

- 50mm silver extrusion frames
 - Internal LED lighting
 - Interchangeable pushfit SEG fabric graphics for all 4 sides
 - Monitor Mount option available
- Kit includes: one frame, 4 SEG backlit intensity push fit fabric graphics panels, 1 opaque liner panel, and one wheeled storage case
 - Lifetime hardware warranty against manufacturer defects





dimensions:

Hardware	Graphic						
Assembled unit: 47.97" w x 120.02" h x 47.97" d 1219mm(w) x 3049mm(h) x 1219mm(d) Approximate weight with case: 108 lbs / 49 kgs	Refer to related graphic template for more information. One year warranty Visit: https://www.theexhibitorshandbook.com/download-graphic-templates						
Shipping	additional information:						
Packing case(s): 1 OCE-2 Shipping dimensions: OCE-2: Expandable case length (l) may vary 18" l x 40" - 66" h x 18" d 458mm(l) x 1016mm-1677mm(h) x 458mm(d) Approximate total shipping weight (includes cases & graphics): 120 lbs / 55 kgs	Graphic material: Backlit Intensity push-fit fabric graphic and opaque liner *This unit requires 9 light bulbs. Lighting Power Requirements: <table><tr><td>Total wattage needed:</td><td>Total ampage needed:</td><td>Voltage used:</td></tr><tr><td>216W</td><td>2.1A</td><td>110V</td></tr></table> When included in a larger kit, a different packaging solution will be listed to accommodate all contents of the kit. Individual packaging no longer provided. 2 person assembly recommended: 	Total wattage needed:	Total ampage needed:	Voltage used:	216W	2.1A	110V
Total wattage needed:	Total ampage needed:	Voltage used:					
216W	2.1A	110V					





This product may include the following materials for recycle:
aluminum, select wood, fabric, cardboard, paper, steel, and plastics.

Included in your kit:


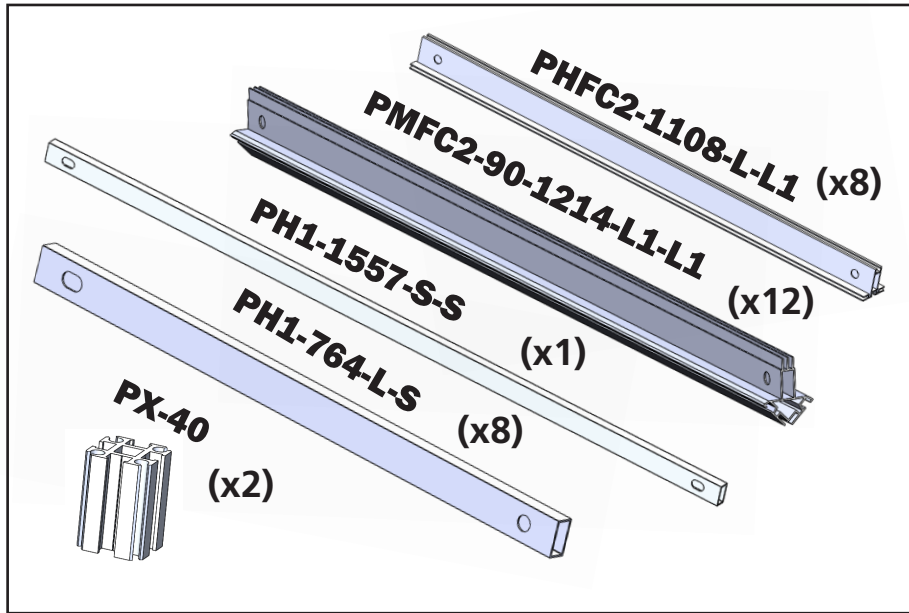


TOP-VIEW

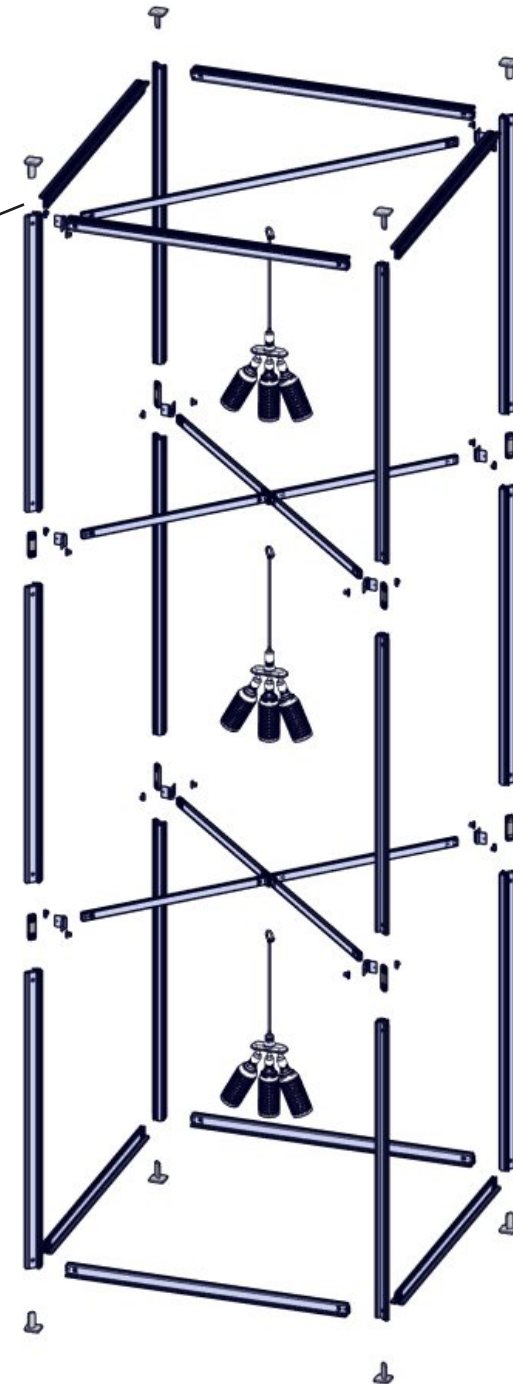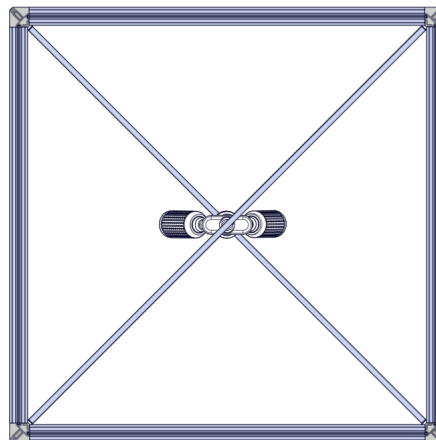


Tower Construction


For this step you will need:

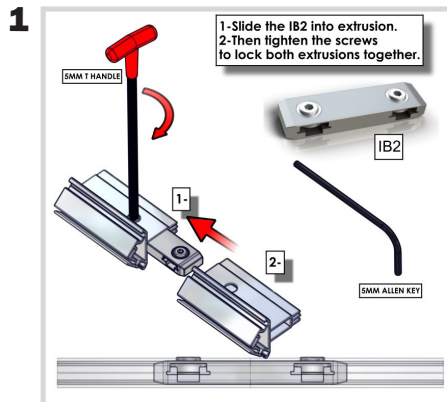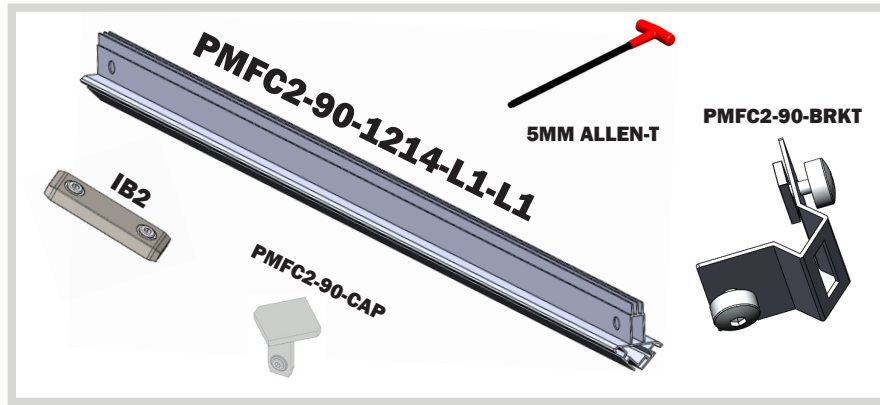

Using the 5mm Allen-T attach your PMFC2s together with your IB2s like the instructions here.


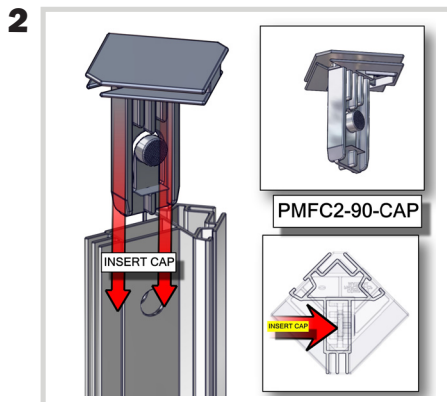


Push down on the snap button on your cap and push it into the top and bottom of the vertical posts until it snaps in place.


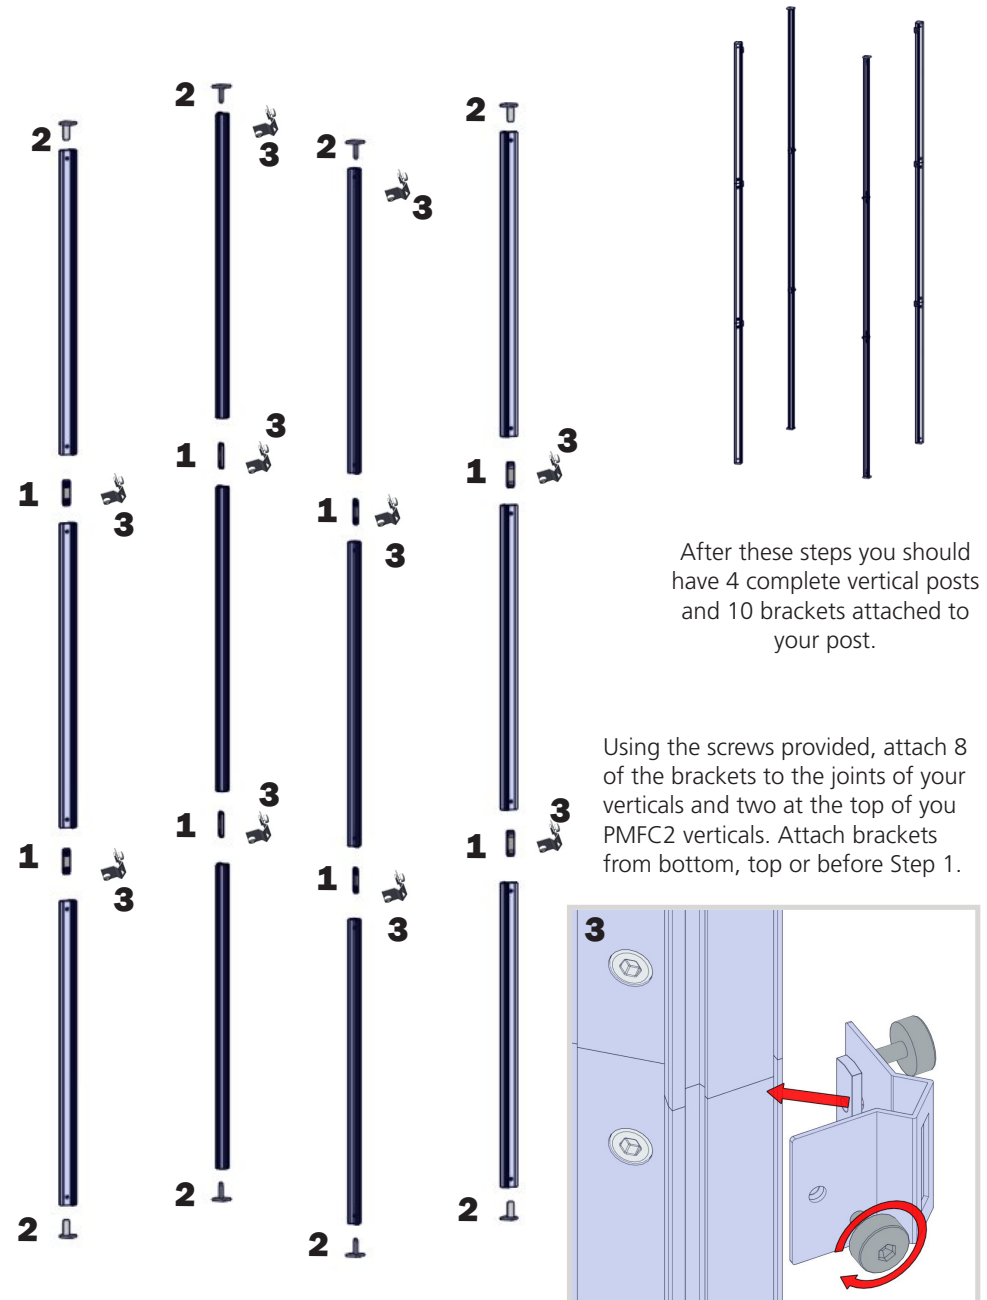


Tower Construction

For this step you will need:

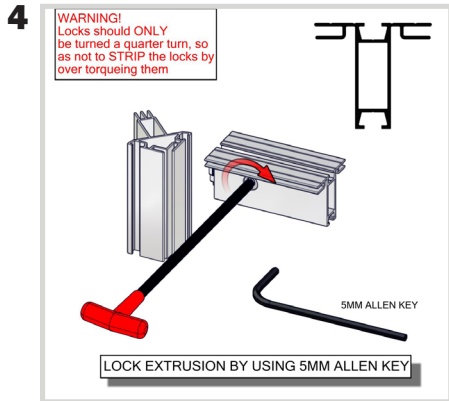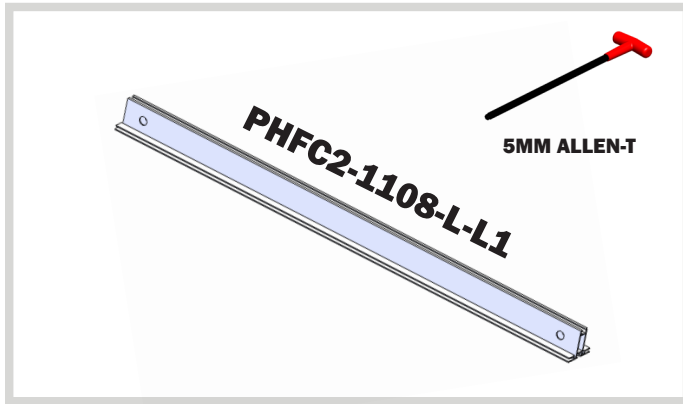



Using the 5mm Allen-T attach your PHFC2s to your PMFC2 verticals made in the previous step.

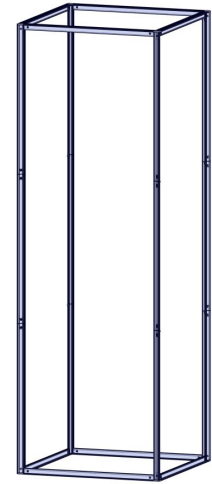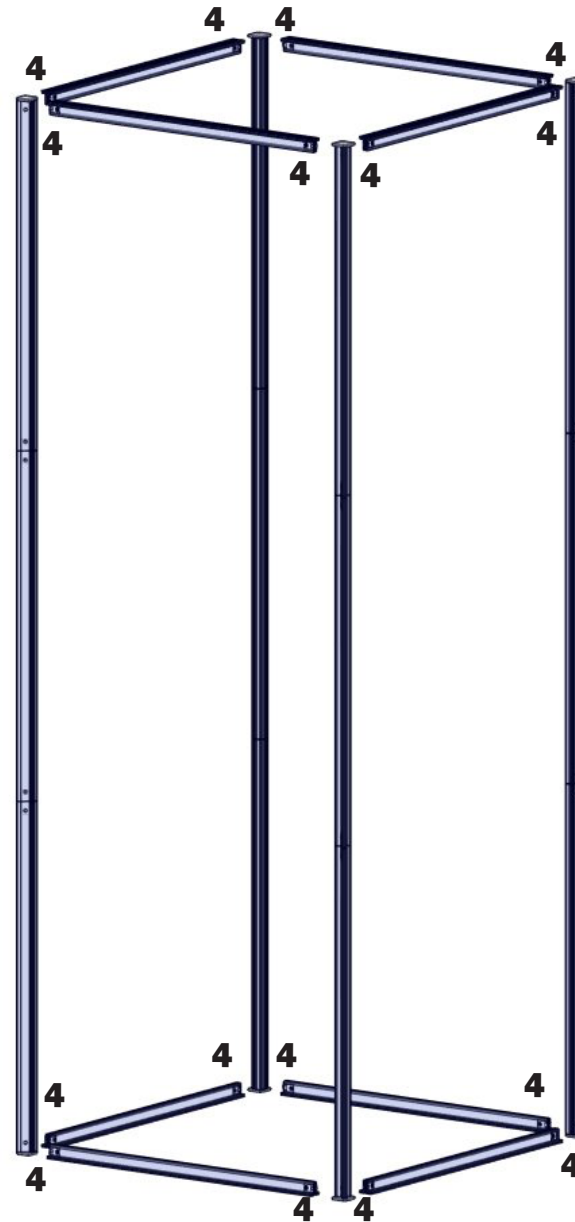


After this step you should have a rectangular tower.

Tower Construction

For this step you will need:

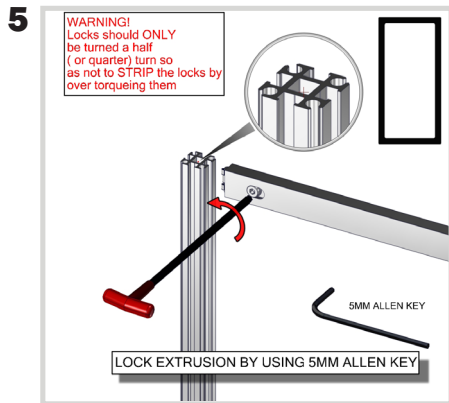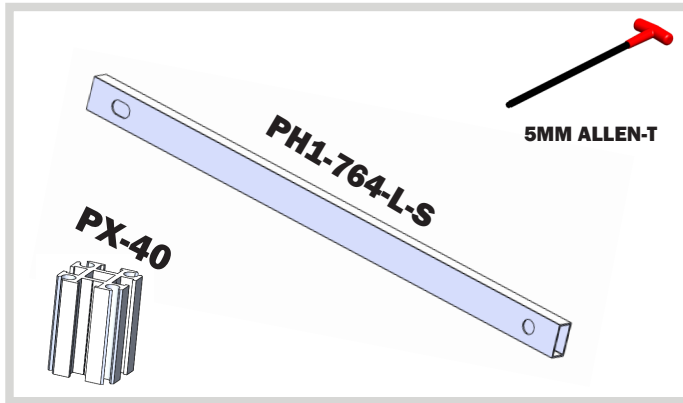



Using the 5mm Allen-T
attach your supporting PH1 extrusions
to the small PX extrusions.

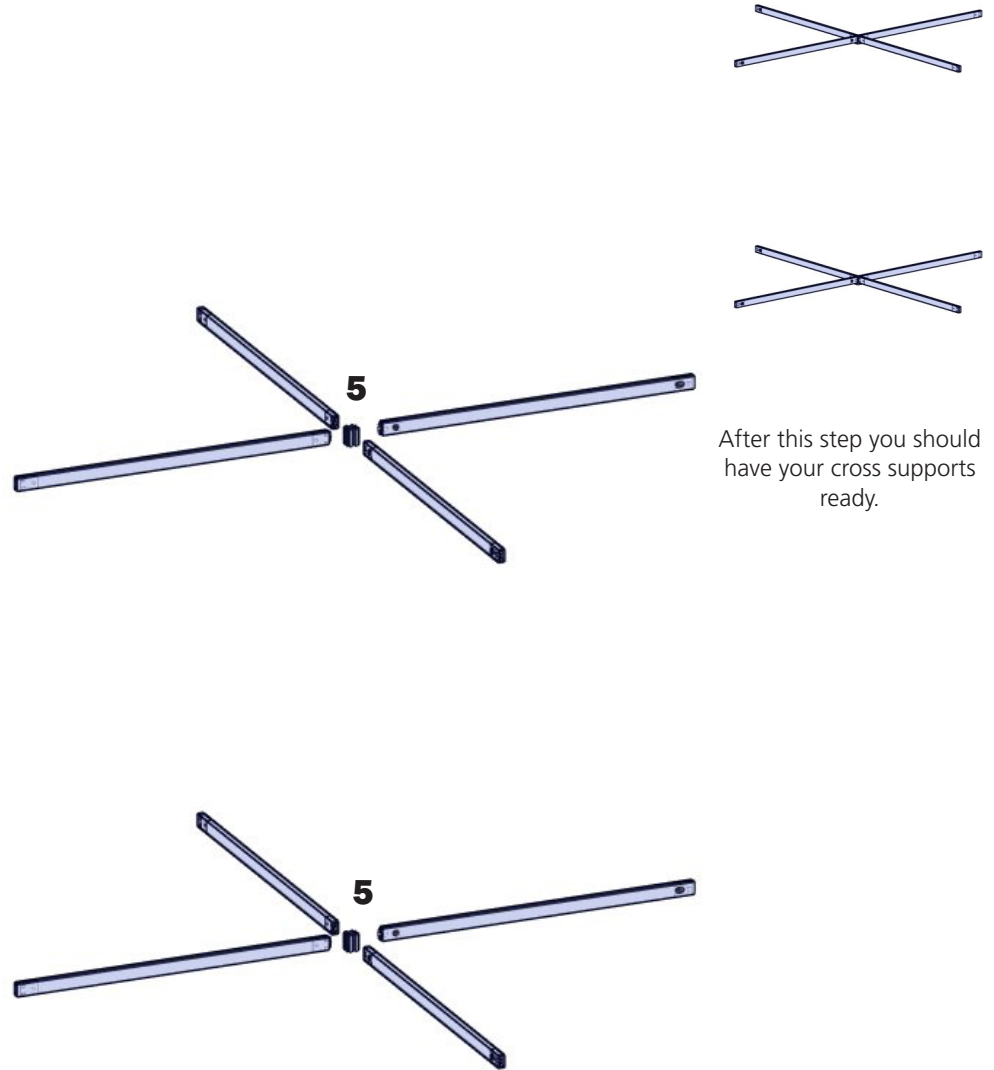



After this step you should
have your cross supports
ready.

Tower Construction

For this step you will need:

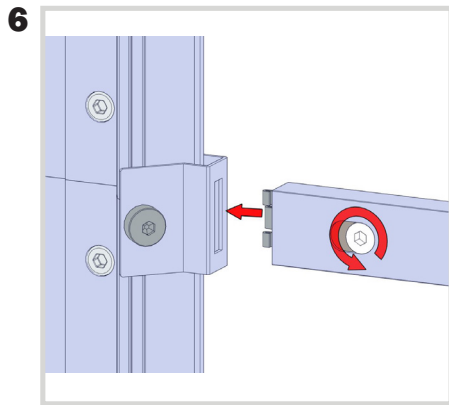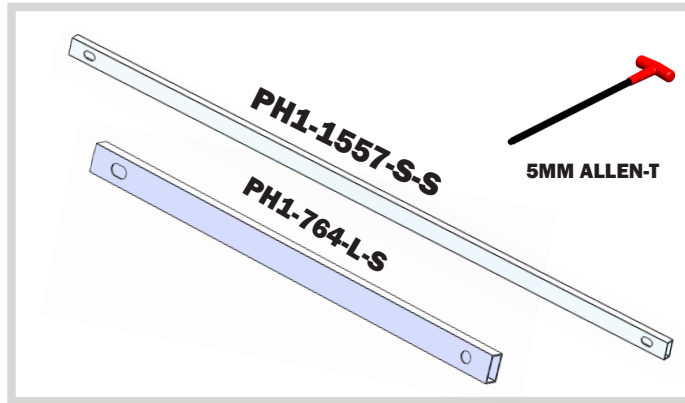

Using the 5mm Allen-T
attach your supporting PH1
extrusions to your brackets.

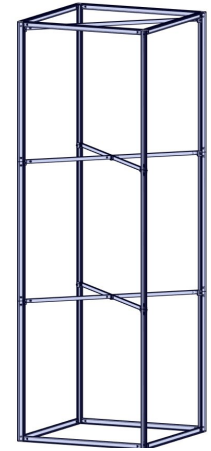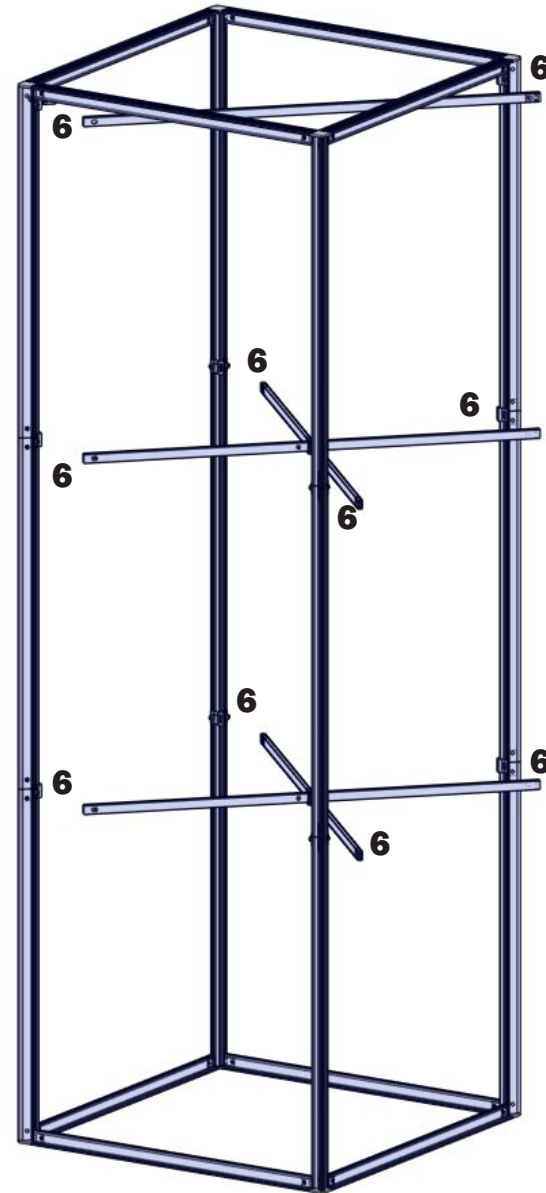


After this step you should
have your supports connected
to your tower.

Tower Construction


For this step you will need:



7

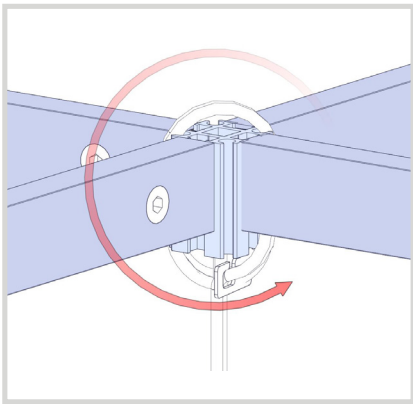



To attach lights to the tower simply wrap the cords around the joints in the middle of the frame.

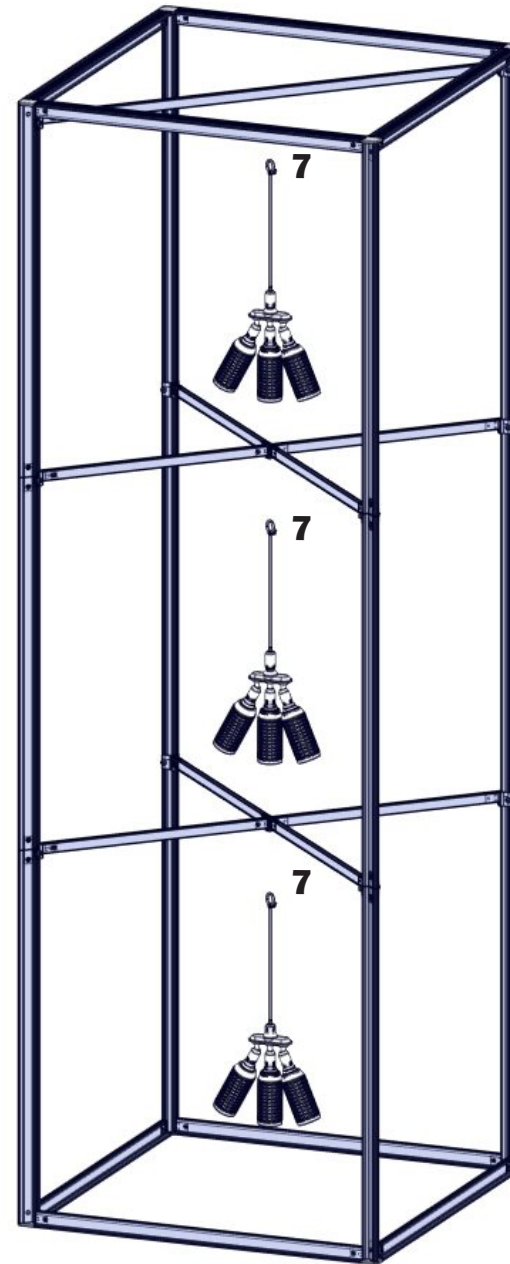


The lights are now attached to your tower.

Graphic Application



For this step you will need:

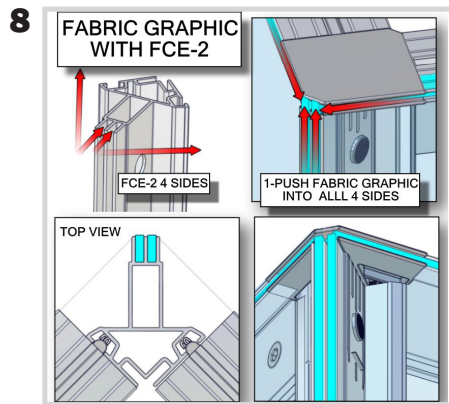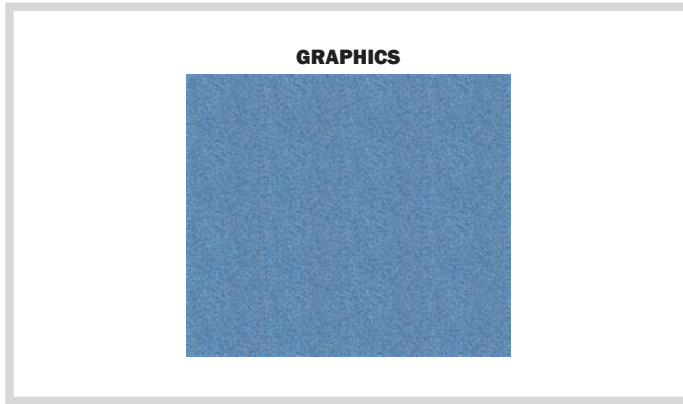

Insert your graphics into the FCE channels of your PMFC2 extrusions.

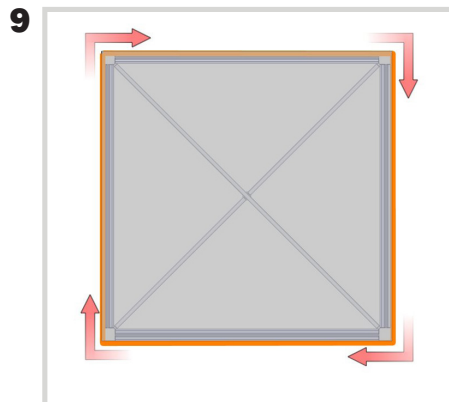

Your opaque liner will attach to the top of your tower with hook and loop fastener on the liner and on the top of the extrusion.

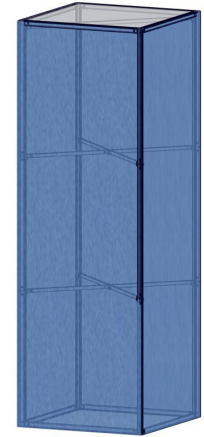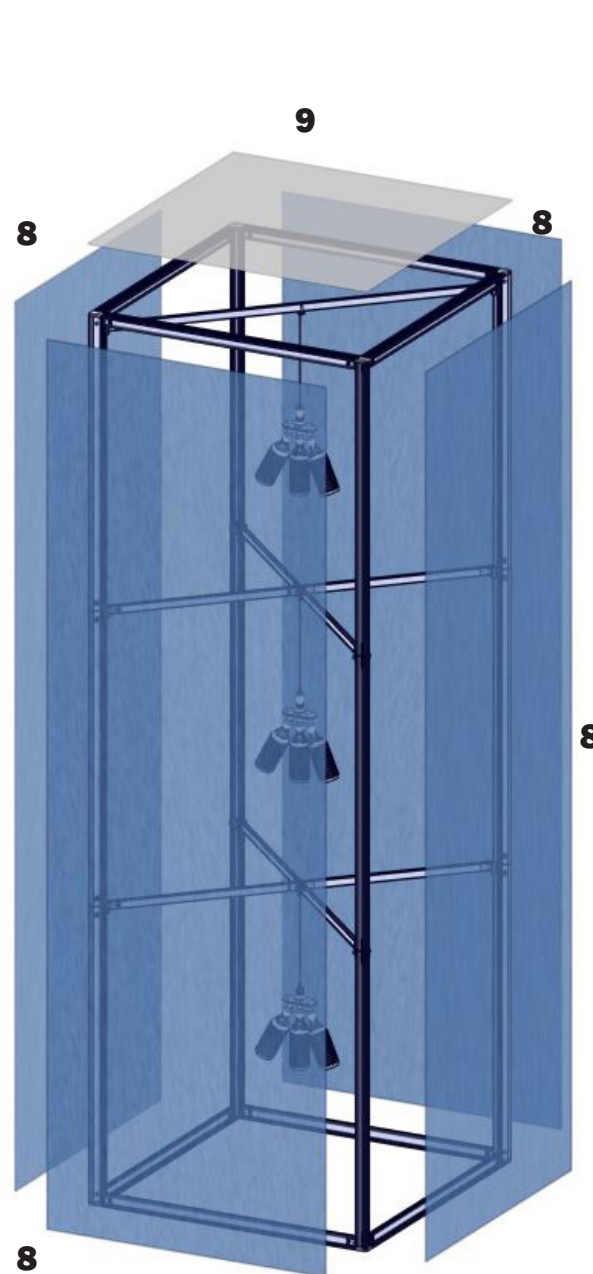

Once your graphics are in place your Tower is now complete.